

1.0 Waste Management Plan

1.1 Manage the waste of the project

A Waste Management Plan (WMP) plays a key role in achieving sustainable waste management throughout all phases of the project. The plan prescribes measures for the collection, temporary storage and safe disposal of the various waste streams associated with the project and includes provisions for the recovery, re-use and recycling of waste. The purpose of this plan is therefore to ensure that effective procedures are implemented for the handling, storage, transportation and disposal of waste generated from the project activities on site.

This WMP has been compiled as part of the project EMPr and is based on waste stream information available at the time of compilation. Construction and operation activities must be assessed on an ongoing basis in order to determine the efficacy of the plan and whether further revision of the plan is required. This plan should be updated once further detail regarding waste quantities and categorisation become available, during the construction and/or operation phases. This plan should be updated throughout the life cycle of the infrastructure established for the Komsberg Substation and associated infrastructure, as required in order to ensure that appropriate measures are in place to manage and control waste and to ensure compliance with relevant legislation.

Prior to the commencement of construction, a detailed Waste Management Method Statement for the site should be compiled by the Contractor.

1.2 Relevant Aspects of the Site

It is expected that the development of various infrastructure will generate construction solid waste, as well as general waste and hazardous waste during the lifetime of the Komsberg Substation and associated infrastructure.

Waste generated on site, originates from various sources, including but not limited to:

Concrete waste generated from spoil and excess concrete.

Contaminated water, soil, rocks and vegetation due to hydrocarbon spills.

Hazardous waste from vehicle, equipment and machinery parts and servicing, fluorescent tubes, used hydrocarbon containers, batteries situated in specially adapted shipping containers, and waste ink cartridges.

Recyclable waste in the form of paper, glass, steel, aluminium, wood/ wood pallets, plastic (PET bottles, PVC, LDPE) and cardboard.

Organic waste from food waste as well as alien and endemic vegetation removal.

Sewage from portable toilets and septic tanks.

Inert waste from spoil material from site clearance and trenching works.

1.3 Legislative Requirements

Waste in South Africa is currently governed by several regulations, including:

- National Environmental Management: Waste Act (NEM: WA), 2008 (Act 59 of 2008);
- National Environmental Management: Waste Amendment Act, 2014 (Act 26 of 2014);
- The South African Constitution (Act 108 of 1996);



- Hazardous Substances Act (Act 5 of 1973);
- Health Act (Act 63 of 1977);
- Environment Conservation Act (Act 73 of 1989);
- Occupational Health and Safety Act (Act 85 of 1993);
- National Water Act (Act 36 of 1998);
- The National Environmental Management Act (Act 107 of 1998) (as amended);
- Municipal Structures Act (Act 117 of 1998);
- Municipal Systems Act (Act 32 of 2000);
- Mineral and Petroleum Resources Development Act (Act 28 of 2002); and
- Air Quality Act (Act 39 of 2004).

Storage of waste must be conducted in accordance with the National Norms and Standards for the Storage of Waste, published in GNR 926.

1.4 Waste Management Principles

An integrated approach to waste management is needed on site. Such an approach is illustrated in Figure 1.

It is important to ensure that waste is managed with the following objectives in mind during all phases of the project:

- Reducing volumes of waste is the greatest priority;
- If reduction is not feasible, the maximum amount of waste is to be recycled; and
- Waste that cannot be recycled is to be disposed of in the most environmentally responsible manner.



The Integrated Waste Management Approach to Waste

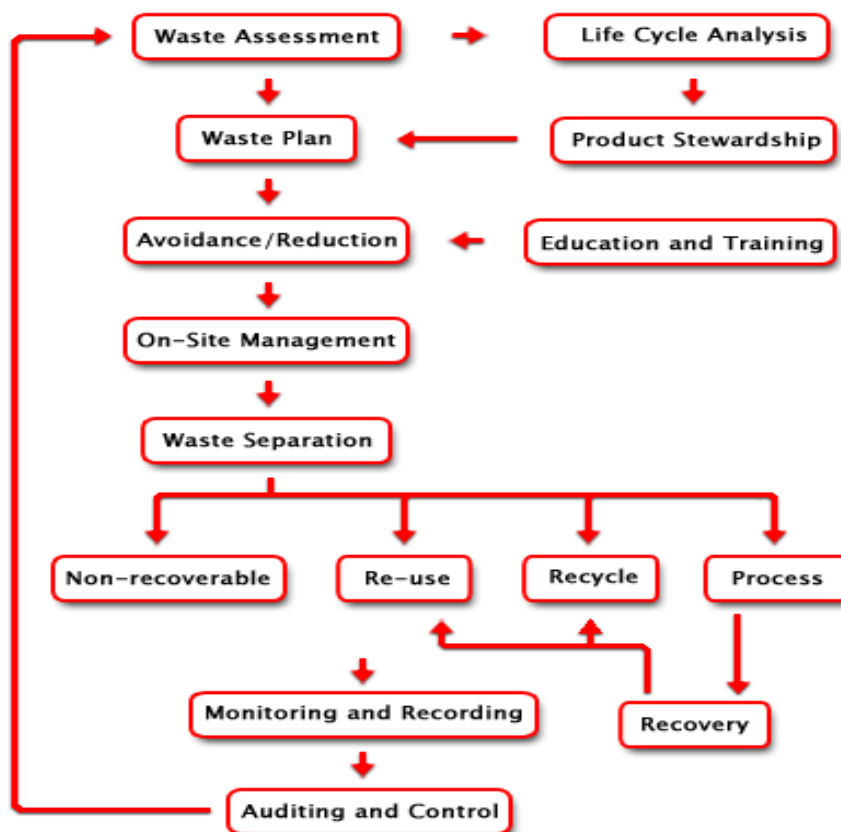


Figure 1: Integrated Waste Management Flow Diagram

(Source: <http://www.enviroserv.co.za>)

1.5 Construction phase

A plan for the management of waste during the construction phase is detailed below. A Method Statement detailing specific waste management practices during construction should be prepared by the Contractor prior to the commencement of construction, for approval by the Resident Engineer.

1.5.1 Waste Assessment / Inventory

- The Environmental Officer (EO), or designated staff member, must develop, implement and maintain a waste inventory reflecting all waste generated during construction for both general and hazardous waste streams.
- Construction methods and materials should be carefully considered in view of waste reduction, re-use, and recycling opportunities, to be pro-actively implemented.
- Once a waste inventory has been established, targets for the recovery of waste (minimisation, re-use, recycling) should be set.
- The EO must conduct waste classification and rating in terms of SANS 10288 and Government Notice 634 published under the NEM: WA.



1.5.2 Waste collection, handling and storage

- It is the responsibility of the EO to ensure that each subcontractor implements their own waste recycling system, i.e. separate bins for food waste, plastics, paper, wood, glass cardboard, metals, etc. Such practises must be made contractually binding upon appointment of the subcontractors.
- Waste manifests and waste acceptance approvals (i.e. receipts) from designated waste facilities must be kept on file at the site office, in order to record and prove continual compliance for future auditing.
- Septic tanks and portable toilets must be monitored by the EO or responsible subcontractor and maintained regularly. Below ground storage of septic tanks must withstand the external forces of the surrounding environment. The area above the tank must be demarcated to prevent any vehicles or heavy machinery from moving around in the surrounding area.
- Waste collection bins and hazardous waste containers must be provided by the principal contractor and subcontractors and placed at strategic locations around the site for the storage of organic, recyclable and hazardous waste.
- A dedicated waste area must be established on site for the storage of all waste streams before removal from site. The storage period must not trigger listed waste activities as per the NEMWA, GN 921 of November 2013, without suitable authorisation.
- Signage/ colour coding must be used to differentiate disposal areas for the various waste streams (i.e. paper, cardboard, metals, food waste, glass etc.).
- Hazardous waste must be stored within a bunded area constructed according to SABS requirements and must ensure complete containment of the spilled material in the event of a breach. As such, appropriate bunding material, design, capacity and type must be utilised to ensure that no contamination of the surrounding environment will occur despite a containment breach. The net capacity of a bunded compound in a storage facility should be at least 120% of the net capacity of the largest tank.
- Take into consideration the capacity displaced by other tanks within the same bunded area and any foundations.
- Treat interconnected tanks as a single tank of equivalent total volume for the purposes of the bund design criteria.
- The location of all temporary waste storage areas must aim to minimise the potential for impact on the surrounding environment, including prevention of contaminated runoff, seepage, and vermin control, while being reasonably placed in terms of centrality and accessibility on site. Where required, an additional temporary waste storage area may be designated, provided identical controls are exercised for these locations.
- Waste storage shall be in accordance with all Regulations and best-practice guidelines and under no circumstances may waste be burnt on site.
- A dedicated waste management team must be appointed by the principal contractors' SHE Officer, who will be responsible for ensuring the continuous sorting of waste and maintenance of the area. The waste management team must be trained in all areas of waste management and monitored by the SHE Officer.
- All waste removed from site must be done by a registered/ licensed subcontractor, who must supply information regarding how waste recycling/ disposal will be



achieved. The registered subcontractor must provide waste manifests for all removals at least once a month or for every disposal made, records of which must be kept on file at the site camp for the duration of the construction period.

1.5.3 Management of waste storage areas

- Waste storage must be undertaken in accordance with the relevant Norms and Standards.
- The position of all waste storage areas must be located so as to ensure minimal degradation to the environment. The main waste storage area must have a suitable storm water system separating clean and contaminated storm water.
- Collection bins placed around the site and at subcontractors' camps (if at a different location than the main site camp) must be maintained and emptied on a regular basis by the principal contractor to avoid overflowing receptacles.
- Inspections and maintenance of the main waste storage area must be undertaken daily. Skips and storage containers must be clearly marked, or colour coded and well-maintained. Monitor for rodents and take corrective action if they become a problem.
- Waste must be stored in designated containers and not on the ground.
- Inspections and maintenance of bunds must be undertaken regularly. Bunds must be inspected for leaks or cracks in the foundation and walls.
- It is assumed that any rainwater collected inside the bund is contaminated and must be treated by oil/water separation (or similar method) prior to dewatering, or removed and stored as hazardous waste, and not released into the environment.
- If any leaks occur in the bund, these must be amended immediately.
- Bund systems must be designed to avoid dewatering of contaminated water, but to rather separate oil and hydrocarbons from water prior to dewatering.
- Following rainfall event bunds must always be dewatered in order to maintain a sufficient storage capacity in the event of a breach.
- No mixing of hazardous and general waste is allowed.
-

1.5.4 Disposal

- Waste generated on site must be removed on a regular basis. This frequency may change during construction depending on waste volumes generated at different stages of the construction process, however removal must occur prior to the storage capacity being reached to avoid overflow of containers and poor waste storage.
- Waste must be removed by a suitably qualified contractor and disposed of at an appropriately licensed landfill site. Proof of appropriate disposal must be provided by the contractor to the EO and ECO.

1.5.5 Record keeping

The success of the WMP is determined by measuring criteria such as waste volumes, cost recovery from recycling and cost of disposal. Recorded data can indicate the effect of training and education, or the need for education. It will provide trends and benchmarks for



setting goals and standards. It will provide clear evidence of the success or otherwise of the plan.

- Documentation (waste manifest, certificate of issue or safe disposal) must be kept detailing the quantity, nature, and fate of any regulated waste for audit purposes.
- Waste management must form part of the monthly reporting requirements in terms of volumes generated, types, storage and final disposal.

1.5.6 Training

Training and awareness regarding waste management shall be provided to all employees and contractors as part of the toolbox talks or on-site awareness sessions with the EO and at the frequency as set out by the ECO.

1.6 Operation phase

It is expected that the operation phase will result in the production of limited amounts of general waste consisting mostly of cardboard, paper, plastic, tins, metals and a variety of synthetic compounds. Hazardous wastes (including grease, oils) will also be generated. All waste generated will be required to be temporarily stored at the facility in appropriately sealed containers prior to disposal at a permitted landfill site or other facilities.

The following waste management principles apply during the operation phase:

-
- The Site Health & Safety Manager must develop, implement and maintain a waste inventory reflecting all waste generated during operation for both general and hazardous waste streams.
- Adequate waste collection bins at site must be supplied. Separate bins should be provided for general and hazardous waste.
- Recyclable waste must be removed from the waste stream and stored separately.
- All waste must be stored in appropriate temporary storage containers (separated between different operation wastes, and contaminated or wet waste).
- Waste storage shall be in accordance with all best-practice guidelines and under no circumstances may waste be burnt on site.
- Waste generated on site must be removed on a regular basis throughout the operation phase.
- Waste must be removed by a suitably qualified contractor and disposed of at an appropriately licensed landfill site. Proof of appropriate disposal must be provided by the contractor and kept on site.
-

1.6.1 Monitoring of Waste Management Activities

Records must be kept of the volumes/ mass of the different waste streams that are collected from the site throughout the life of the project. The appointed waste contractor is to provide monthly reports to the operator containing the following information:

- Monthly volumes/ mass of the different waste streams collected;
- Monthly volumes/ mass of the waste that is disposed of at a landfill site;



- Monthly volumes/ mass of the waste that is recycled;
- Data illustrating progress compared to previous months.

This report will aid in monitoring the progress and relevance of the waste management procedures that are in place. If it is found that the implemented procedures are not as effective as required, this WMP is to be reviewed and amended accordingly. This report must form part of the EO's reports to the ECO on a monthly basis.

